

Pixel-Isolated Liquid Crystal Mode for Flexible Display Applications

Hyun-Gee Lee, Jong-Wook Jung and Jae-Hoon Kim

Department of Physics, Hallym University, Chunchon, Kangwon-Do 200-702, Korea

ABSTRACT

We developed a new device structure using anisotropic phase separation from liquid crystals (LCs) and polymer composite materials for flexible display applications. In the device, the LC molecules are isolated in pixels where LCs are surrounded by polymer layers. These devices show very good mechanical stability against external pressure. The electro-optic characteristics and the mechanical stability of the devices are discussed in view of the flexible display applications.

INTRODUCTION

Liquid crystals (LCs) have been extensively studied and used for display applications because of their efficient light-control capabilities with low power consumption. These advantages come from LC's hydrodynamic properties and high birefringence. In general, LC devices are prepared by sandwiching a LC between two glass substrates with transparent electrodes and alignment layers to obtain specific configuration of the optic axis. One of primary role of these substrates is supporting LC molecular orientation from external bending or pressure, which alter the arrangement of LC molecules and diminishes optical properties of the device.

In recent years, LC devices using plastic film substrates have drawn much attention for use in applications such as smart cards, PDA, and head mount displays because of their lighter weight,

thinner packaging, flexibility, and reduced manufacturing cost through continuous roll processing¹⁻³. Different electro-optical modes have been proposed for use in plastic LCDs including TN/STN, cholesteric, polymer dispersed LC (PDLC), and bistable FLC modes.

However, it is clear that plastic substrates can't give a solid mechanical support for the molecular alignment of LCs between them. Specially, ferroelectric LCs show very weak mechanical stability because of the presence of fragile smectic layers even between glass substrates.

In order to overcome the above problem, polymer wall and/or network as a supporting structure have been proposed and demonstrated. These structures were fabricated using an anisotropic phase separation method from polymer and LC composite systems by applying patterned electric field or spatially modulated UV intensity^{4,5}. However, those methods require high electric field or there exist residual polymers in unexposed region which reduce optical properties of the device.

In this paper, we report pixel isolated LC (PILC) mode where the LC is isolated in the pixel surrounded by polymer. The PILC mode not only shows good mechanical stability, but also operates in low voltage.

EXPERIMENTAL

The materials used in this study are commercial nematic LC (NLC) E48 (Merck), ferroelectric LC

(FLC) Felix 15-100 (Hoechst), and photocurable prepolymer NOA72 (Norland). For the alignment layers, we used polyimide RN1286 (Nissan) or Nylon 6. The alignment layers are spin coated on one substrate followed by rubbing to achieve homogeneous LC alignment. We note that the results of phase separation are greatly affected by alignment layers. These results will be published elsewhere. The cell gap was maintained using glass spacers of 4 μm . A solution of the prepolymer and the LC, in the ratio 70 wt%:30 wt% for FLC and 50 wt%:50 wt% for NLC, is introduced into the cell at a temperature corresponding to the isotropic state of the LCs. The cells are exposed to UV light of $\lambda = 350 \text{ nm}$ to initiate polymerization. The source of UV light is a Xenon (Oriel model 6269) lamp operated at 200 W of electrical power. Fig. 1 shows the fabrication process for a pixel isolated LC. The photomask is placed on one of glass substrates without the alignment layer. The cell with the LC+prepolymer mixture is irradiated with UV light for ~ 10 minutes. A second exposure is performed without the mask for five minutes to fully harden the polymer. During this process, the LC molecules which remain in polymer network after first UV exposure are expelled from the polymerized volume.

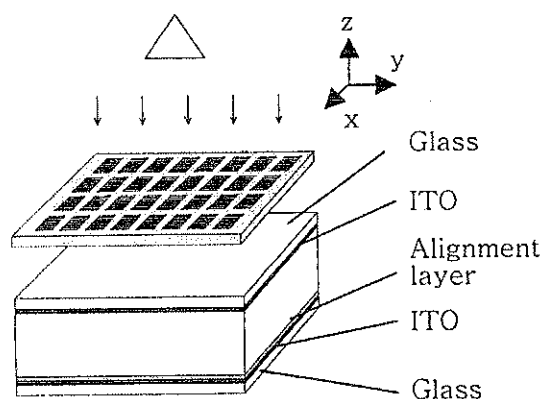


Fig. 1. Experimental set-up

RESULTS AND DISCUSSIONS

In the simplest case, when a cell filled with a mixture of LC and prepolymer is exposed to normally incident UV light, an intensity gradient in the (z-) direction perpendicular to the cell is produced due to UV's absorption by the mixture. The intensity gradient causes anisotropic phase separation along the z-direction. Moreover, the surface interaction between LC and alignment layer plays essential role for the anisotropic phase separation¹². The LC materials fully wet the RN1286 or N6 alignment layer and dewet on ITO substrate. The LC molecules near the alignment layer respond to its anchoring potential and align parallel to the rubbing direction. Oriented LC molecules determine the microscopic structure of the polymer-LC interface which becomes compatible with their alignment. Therefore the presence of alignment layer promotes the surface induced anisotropic phase separation in the direction of sample thickness. In our previous study, we successfully fabricated phase separated composite organic film (PSCOF) structure which has adjacent uniform polymer and LC layers using this one dimensional anisotropic phase separation method⁶.

The use of a suitable mask during UV exposure produces additional intensity gradients in the (xy-) plane of the cell. Monomers in high intensity region near the UV source, undergo polymerization first and the monomers in low intensity region diffuse to

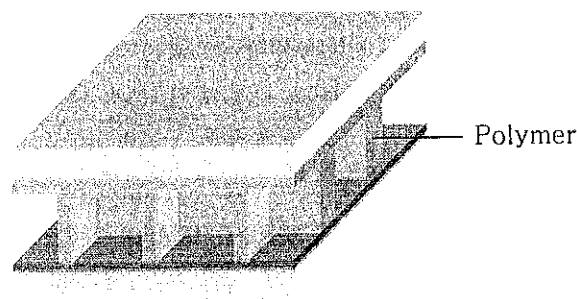


Fig. 2. PILC structure

the high intensity region, to maintain their relative concentration, and join the polymerization reaction. The LC molecules are immiscible in and are expelled from the polymer. Therefore, the phase separation is anisotropic in 3-dimension.

Fig. 2 shows the resultant element after UV exposure. Due to three dimensional anisotropic phase separation, the LCs are isolated in the pixels surrounded by polymer wall, namely pixel isolated LC (PILC) mode. Any LC modes such as nematic, ferroelectric, and cholesteric modes can be applicable.

Fig. 3 shows microscopic textures of pixel isolated NLC (PINLC) cell at room temperature after UV exposure under polarizing microscope. The pixels were rich in LC with uniform alignment and the interpixels were rich in polymer with some embedded LC molecules.

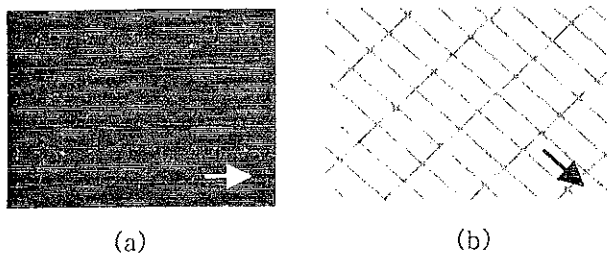


Fig. 3. Alignment textures of pixel isolated NLC cell: The rubbing direction indicated by arrow is rotated (a) 0° and (b) 45° with respect to one of crossed polarizers.

We note that LC molecules in polymer can be controlled by mixing ratio, UV intensity and exposure time, environment temperature, and sample

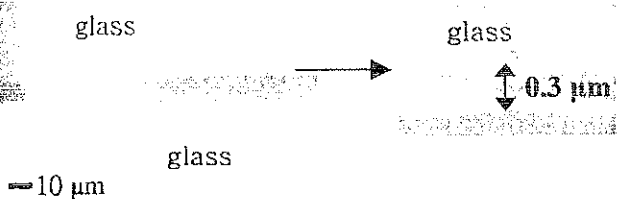


Fig.4. SEM image of PILC sample

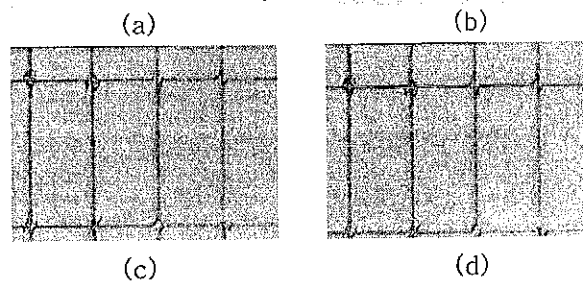


Fig. 5. Alignment textures before [(a) and (c)] and after [(b) and (d)] external pressure: (a) and (b) are normal SSFLC cell, and (c) and (d) are PIFLC cell.

thickness.

The cross section image of PINLC using scanning electron microscope was shown in Fig. 4. It can be seen well defined polymer wall in interpixels and uniform polymer layer in upper glass. Therefore the LC molecules are surrounded by polymer and isolated into pixels. The polymer walls act as supporting structure.

We now describe the alignment stability of PILC against an external mechanical shock. Such mechanical stability has been one of the main problems to commercialize plastic LCDs, specially using FLCs. Fig. 5 shows microscopic texture of normal [(a) and (b)] and pixel isolated FLC (PIFLC) [(c) and (d)] before and after a external pressure. In normal FLC, the texture shows crucial change due to broken smectic layers after mechanical shock. It can be seen from Fig. 5 (c) and (d) that no appreciable structural change in PIFLC was present.

Fig. 6 shows electro-optic behavior of normal, PSCOF and PINLC samples. In all samples, transmittance and response time show almost same behavior.

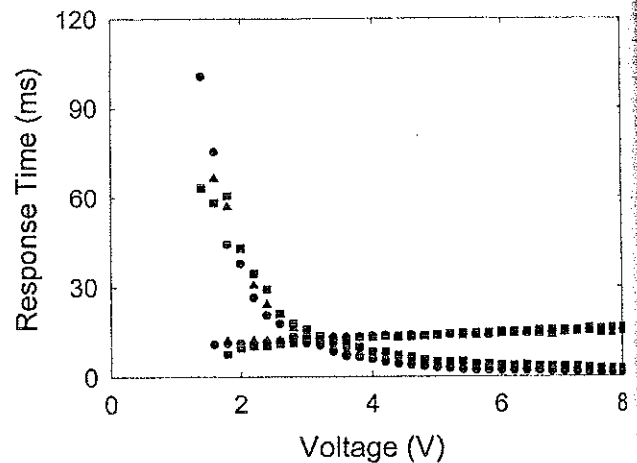
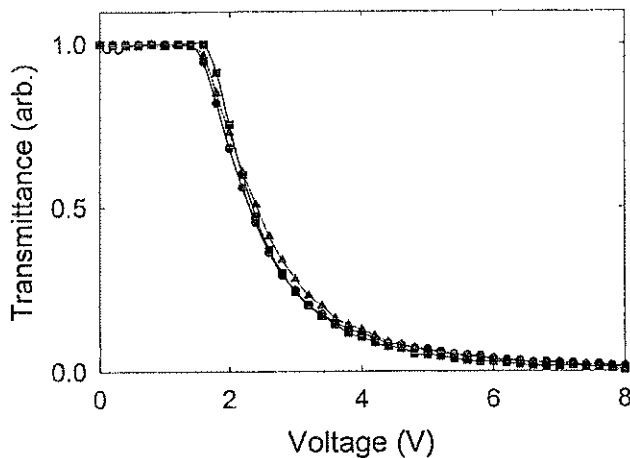


Fig. 6. Electro optical properties of normal (circle), PSCOF (triangle), and PINLC (square) as a function of applied voltages.

CONCLUDING REMARKS

In conclusion, we successfully fabricated a new device structure using three dimensional anisotropic phase separation method. In the device, the LC molecules are isolated in pixels where LCs are surrounded by polymer layers. These devices show very good mechanical stability against external pressure. The electro-optic characteristics are almost same as normal nematic LC structure.

ACKNOWLEDGEMENT

This work was supported from Information Display R&D Center, one of the 21st Century Frontier R&D Program funded by the Ministry of Science and Technology of Korean government.

REFERENCES

- [1] F. Matsumoto, T. Nagata, T. Miyabori, H. Tanaka, and S. Tsushima, SID '93 DIGEST, p965 (1993).
- [2] J. L. West, M. Rouberol, J. J. Francl, J. W. Doane, and M. Pfeiffer, ASIA DISPLAY '95 Conference paper, p55 (1995).
- [3] R. Buerkle, R. Klette, E. Lueder, R. Bunz, and T.

Kallfass, SID '97 DIGEST, p109 (1997).

[4] Y. Kim, J. Francl, B. Taheri, and J. L. West, Appl. Phys. Lett. 72, 2253 (1998).

[5] H. Sato, H. Fujikake, Y. Iino, M. Kawakita, and H. Kikuchi, Jpn. J. Appl. Phys. 41, 5302 (2002).

[6] Q. Wang, H. Choi, B. Acharya, V. Vorflusev, J. - H. Kim, and S. Kumar, IMID '01 Conference paper (2001).



IDW '03

Proceedings
of
The 10th International Display Workshops

Workshops on

- LC Science and Technologies
- Active Matrix Displays
- FPD Manufacturing, Materials and Components
- CRTs
- Plasma Displays
- EL Displays, LEDs and Phosphors
- Field Emission Display
- Organic EL Displays
- 3D/Hyper-Realistic Displays and Systems
- Applied Vision and Human Factors
- Projection and Large-Area Displays, and Their Components

Topical Session on

- Electronic Paper

December 3 - 5, 2003
Fukuoka International Congress Center
Fukuoka, Japan

TABLE OF CONTENTS

<p>LCTp1 - 5 Optical Compensation of an MVA-LCD with Circular Polarizers 121 <i>T. Houryu, Y. Iwamoto*, Y. Jimura</i> <i>Tokyo Univ. of A&T, Japan</i> <i>*Stanley Elec., Japan</i></p>	<p>LCTp3 - 2 Resolution Improvement of Projection Images in Vertically Aligned Ferroelectric Liquid Crystal Devices with Surface Relief Gratings 161 <i>C.-J. Yu, Y. Choi, S.-D. Lee</i> <i>Seoul Nat. Univ., Korea</i></p>
<p>LCTp1 - 6 Optical Compensation Method of In-Plane Switching Twisted Nematic Mode 125 <i>S. Oka, K. Kobayashi, Y. Iwamoto*, Y. Toko*, M. Kimura, T. Akahane</i> <i>Nagaoka Univ. of Tech., Japan</i> <i>*Stanley Elec., Japan</i></p>	<p>LCTp3 - 3 Bistable Microlens Array Using Ferroelectric Liquid Crystals 165 <i>H.-G. Lee, J.-W. Jung, J.-H. Kim</i> <i>Hallym Univ., Korea</i></p>
<p>LCTp1 - 7 Influence of Inter-Data Line Crosstalk on Viewing Characteristics for LCDs 129 <i>S.-I. Yoon, S.-H. Yoon*, M.-W. Choi, J.-H. Lee, C.-S. Lee*, J.-W. Kim, H.-J. Yoon, T. Won</i> <i>Inha Univ., Korea</i> <i>*Sanayi Sys., Korea</i></p>	<p>LCTp3 - 4 Study on the Pretransition Effect of Antiferroelectric LCD 169 <i>S. M. An, C. G. Jhun, S. O. Moon, G.-D. Lee, T.-H. Yoon, J. C. Kim</i> <i>Pusan Nat. Univ., Korea</i></p>
<p>LCTp1 - 8 Analysis of Diffraction Efficiency of Holographic Polymer Dispersed Liquid Crystal for Polarization Converting Device 133 <i>A. Ogiwara, K. Sogou, M. Takeda</i> <i>Takamatsu Nat. College of Tech., Japan</i></p>	<p>9:30 - 12:00 Poster/AI Room (Room 203+204) Poster LCTp4: LC Alignment</p>
<p>LCTp1 - 9 Fabrication of Transmission Holographic Polymer Dispersed Liquid Crystal Based on Noncrosslinked Polymers 137 <i>E. H. Kim, J. Y. Woo, B. K. Kim</i> <i>Pusan Nat. Univ., Korea</i></p> <p style="text-align: center;"><i>See Late News (p. 1645)</i></p>	<p>LCTp4 - 1 Novel Phase Transition from Vertical Alignment to Optically Compensated Splay 173 <i>S. J. Kim*, H. Y. Kim**, S. H. Hong**, S. Y. Kim**, Y. J. Lim**, S. H. Lee*</i> <i>*Chonbyk Nat. Univ., Korea</i> <i>**BOE-HYDIS Tech., Korea</i></p>
<p>9:30 - 12:00 Poster/AI Room (Room 203+204) Poster LCTp2: Reflective LCDs</p>	<p>LCTp4 - 2 Sensitizing Effect and Dichroic Ratio of Fluorescent Nematic Liquid Crystals 177 <i>R. Yamaguchi, D. Hiroshima, S. Sato</i> <i>Akita Univ., Japan</i></p>
<p>LCTp2 - 1 Reduced Power Consumption in a Single-Polarizer Reflective TN-LCD with Two Retardation Films 141 <i>S. Yunoki, H. Hando, Y. Sakamoto, I. Fukuda</i> <i>Kanazawa Inst. of Tech., Japan</i></p>	<p>LCTp4 - 3 Anchoring Properties of Photoaligned Azo Dye Materials 181 <i>V. Chigrinov, A. Muravski, H. S. Kwok, H. Takada*, H. Akiyama*, H. Takatsu*</i> <i>Hong Kong Univ. of Sci. & Tech., Hong Kong</i> <i>*Dainippon Ink & Chems., Japan</i></p>
<p>LCTp2 - 2 Optical Characteristics of Reflective HAN Mode TFT-LCDs 145 <i>Y.-I. Park, D.-H. Suh, J.-D. Noh, W.-G. Lee, G. Son, J.-Y. Lee</i> <i>BOE-HYDIS Tech., Korea</i></p>	<p>LCTp4 - 4 Application of Infrared Ellipsometry to Characterize Molecular Orientation of Rubbed Polyimide Films 185 <i>I. Hirose</i> <i>Japan Synchrotron Radiation Res. Inst., Japan</i></p>
<p>LCTp2 - 3 Optical Characteristics of Transflective TN Mode TFT-LCDs 149 <i>D.-H. Suh, Y.-I. Park, J.-D. Noh, G. Son, J.-Y. Lee</i> <i>BOE-HYDIS Tech., Korea</i></p>	<p>LCTp4 - 5 New Alignment Method by Imprinting of LC Alignment on Polymer Layers 189 <i>J.-W. Jung, J.-H. Kim</i> <i>Hallym Univ., Korea</i></p>
<p>LCTp2 - 4 Vertically-Aligned Transflective LCD with Patterned Electrodes 153 <i>H. W. Do, S. J. Park, S. H. Lee, G.-D. Lee, T.-H. Yoon, J. C. Kim</i> <i>Pusan Nat. Univ., Korea</i></p> <p style="text-align: center;"><i>See Late News (p. 1645)</i></p>	<p>LCTp4 - 6 Dependence of Threshold Behavior upon Surface Distribution of Polymer Chains in a TN-LC Cell 193 <i>J. S. Gwag, T.-M. Kim, G.-D. Lee, J. C. Kim, T.-H. Yoon</i> <i>Pusan Nat. Univ., Korea</i></p>
<p>9:30 - 12:00 Poster/AI Room (Room 203+204) Poster LCTp3: FLC/AFLC</p>	<p>LCTp4 - 7 Azimuthal Anchoring Properties Related to Distribution of Polyimide Chains in a TN-LC Cell 197 <i>J. S. Gwag, J. W. Lee, G.-D. Lee, T.-H. Yoon, J. C. Kim</i> <i>Pusan Nat. Univ., Korea</i></p>
<p>LCTp3 - 1 Pixel-Isolated Liquid Crystal Mode for Flexible Display Applications 157 <i>H.-G. Lee, J.-W. Jung, J.-H. Kim</i> <i>Hallym Univ., Korea</i></p>	